

# COMMUNICATION CARD SLOT ADAPTER


## QUICK START

### SUPPORTED DEVICES

NetMan 208 – MultiCOM 302

### INSTALLATION

Remove the two retaining screws, insert the card and fix it with the screws.

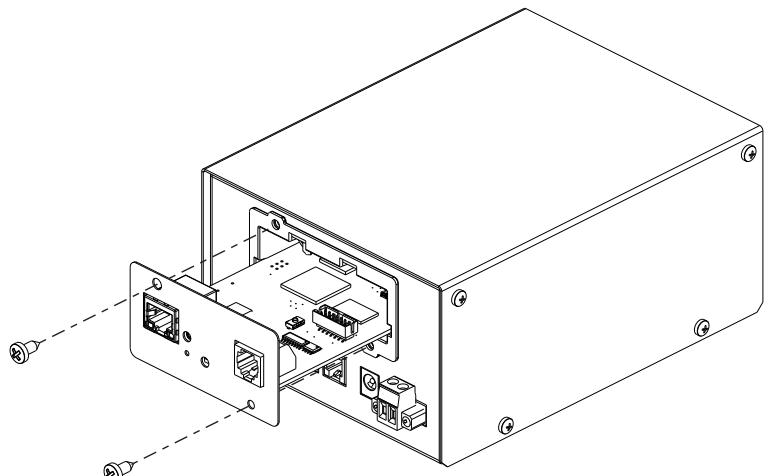


Connect to the UPS serial port.

Only one port can be connected.

Connect to the power supply.

Only one port can be connected.

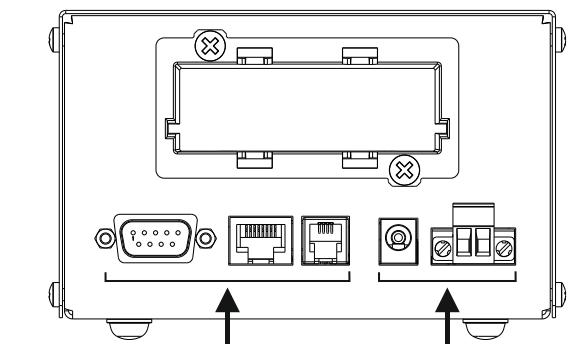

### COMMUNICATION PORTS

SERIAL PORTS PINOUT		
DB9		RJ45
	PIN	Signal
	2	RXD
	3	TXD
	5	GND
RJ45		RJ11
	PIN	Signal
	2	RXD
	3	TXD
	5	GND
RJ11		RJ11
	PIN	Signal
	2	TXD
	3	RXD
	4	GND

### POWER SUPPLY

DC INPUT POWER CONNECTIONS	
JACK 2mm	SCREW TERMINAL
	-V +V

## IEWS AND DIMENSIONS

